



SANWAYAUDIO

<https://www.china-sanway.com>

08W50-8

Electrical Parameters

Re	5.7 Ohm
Krm	0.0024 Ohm
Erm	0.82
Kxm	0.05 Ohm
Exm	0.46
Cmes	152.34 μ F
Lces	26.21 mH
Res	107.57 Ohm
fs	79.6 Hz

Mechanical Parameters

(using laser)


Mms	22.052 g
Mmd (Sd)	18.256 g
Rms	1.346 kg/s
Cms	0.181 mm/N
Kms	5.52 N/mm
Bl	12.032 N/A
Lambda s	0.071

Loss factors

Qtp	0.439
Qms	8.2
Qes	0.434
Qts	0.412

Other Parameters

Vas	12.8955 l
n0	1.442%
Lm	93.79 dB
Ln0m	95.27 dB
rmse Z	2.70%
rmse Hx	1.15%
Series resist	0 Ohm
Sd	224.32 cm ²

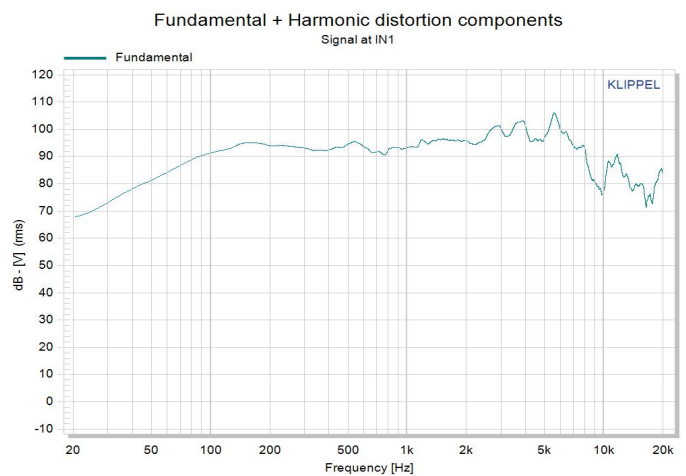

<https://www.china-sanway.com>