



**SANWAYAUDIO**

<https://www.china-sanway.com>

# 15W76-8

## Electrical Parameters

Re	5.33 Ohm
Krm	0.0029 Ohm
Erm	0.79
Kxm	0.0141 Ohm
Exm	0.69
Cmes	266.44 $\mu$ F
Lces	51.83 mH
Res	149.13 Ohm
fs	42.8 Hz

## Mechanical Parameters

(using laser)


Mms	107.325 g
Mmd (Sd)	78.542 g
Rms	2.701 kg/s
Cms	0.129 mm/N
Kms	7.77 N/mm
Bl	20.07 N/A
Lambda s	0.087

## Loss factors

Qtp	0.385
Qms	10.692
Qes	0.382
Qts	0.369

## Other Parameters

Vas	136.4823 l
n0	2.695%
Lm	96.51 dB
Lnom	98.27 dB
rmse Z	2.77%
rmse Hx	2.22%
Series resist	0 Ohm
Sd	865.7 cm <sup>2</sup>

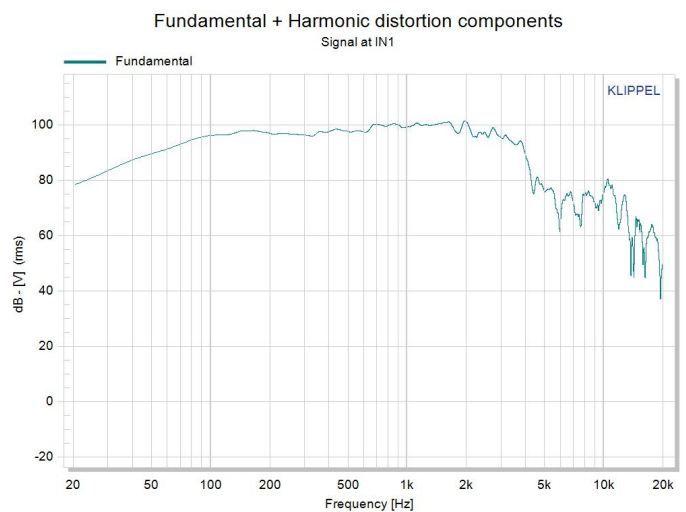

<https://www.china-sanway.com>